

LAMP SPECIFICATIONS	FL-APPLE-10W	FL-APPLE-30W	FL-APPLE-50W	FL-APPLE-50W-PIR
Lumens total flux	850lm	2500lm	4000lm	4000lm
Rated Wattage	10W	30W	50W	50W
Product Size	155*90*24mm	215*130*24mm	330*218*44mm	330*218*44mm
Number of switching cycles before premature lamp failure	>10000	>10000	>10000	>10000
Dimmable	No	No	No	No
Beam angle	120°	120°	120°	120°
Life-span	25000H	25000H	25000H	25000H
CRI (RA)	>80	>80	>80	>80
Power Factor	>0.5	>0.9	>0.9	>0.9
Starting time	<1s	<1s	<1s	<1s
Replacement (Halogen)	≈50W	≈150W	≈250W	≈250W

Not suitable for accent lighting



EVENTUALLY YOU MAY WANT TO REPLACE THIS PRODUCT:

Regulations require the recycling of waste from Electrical and Electronic Equipment (European "WEEE Directive" effective August 2005-UK WEEE Regulation effective 2nd January 2007). Environment Agency.

WHEN YOUR PRODUCT COMES TO THE END OF ITS LIFE OR YOU CHOOSE TO REPLACE IT, PLEASE RECYCLE IT WHERE FACILITIES EXIST-DO NOT DISPOSE WITH HOUSEHOLD WASTE

IF YOU EXPERIENCE PROBLEMS:

If you believe your product is defective, please return it to the place where you bought it. Our Technical Team will gladly advise on any of our lighting products, but may not be able to give specific instructions regarding individual installations.



READ THIS FIRST:

Check the pack and make sure you have all of the parts listed on the front of this booklet. If not, contact the outlet where you bought this product.

This product contains glass, care must be taken when assembling, fitting or handling to prevent personal injury or damage to the product.

This light fitting must be installed by a competent person in accordance with the current building and IEE wiring regulations.

As the buyer, installer and/or user of this product it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Our lighting cannot accept any liability for loss, damage or premature failure resulting from inappropriate use.

This product is designed and constructed according to the principles of the appropriate European standard.

Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock off MCB.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard and masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Before making fixing hole(s), check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.

Make sure that the fixings are strong enough to support the considerable weight of the fitting and hold it rigidly.

The lamp must be positioned so that there is at least 0.5m (500mm) between the bulb and any illuminated surface. Floodlights should be positioned well away from flammable materials.

Do not attach to surfaces which are damp, freshly painted or otherwise electrically conductive (e.g. metallic surfaces).

This product is designed for permanent connection to fixed wiring; this must be a suitable circuit (protected with the appropriate MCB or fuse).

When making connections ensure that the terminals are tightened securely and that no strands of wire protrude beyond conductors and not onto any insulation.

This product must be connected to an earth termination.

This product is not intended to be used by children and persons with sensory, physical and/or mental impairments that would prevent them from using it safely.

IMPORTANT-if the external flexible cable of this luminaire is damaged it should be exclusively replaced by a qualified engineer.

You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out, these tests are specified in the current IEE wiring and building regulations. If in doubt, consult a qualified electrician.

Do not carry or lift the floodlight by the mains supply cable.

LAMP REPLACEMENT:

This luminaire has a sealed LED lamp and is maintenance free, no lamp replacement is required.






CLEANING:

Clean this light fitting only with a soft dry cloth. Do not use any chemical or abrasive cleaners.

INSTALLATION:

1. Choose the location for your new light fitting giving considerations to the points listed opposite.
2. Isolate mains.
3. Using the bracket, mark fixing points and drill fixing holes. According to your chosen fixing method (fixings not included). See diagrams opposite for marking measurements.
4. Terminate loose ends of wire to an appropriate IP rated junction box or similar, ensuring the live, Earth and Neutral polarities are observed.
5. Restore power and test the luminaire.
6. Adjust floodlight head towards the area to be illuminated and lock off using two clamping bolts.

L: Live - Brown / Red
N: Neutral - Blue / Black
E: Earth - Yellow / Green

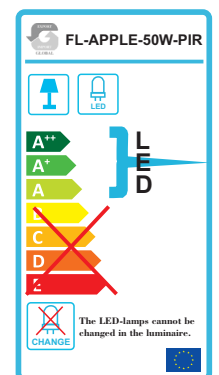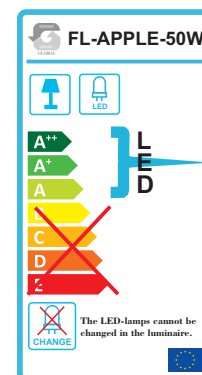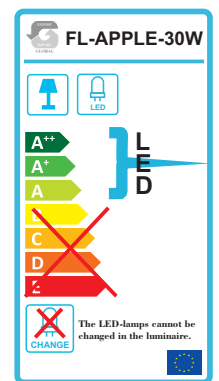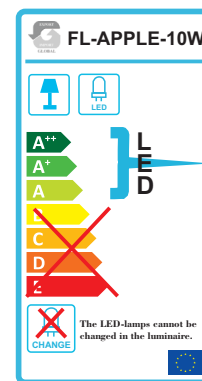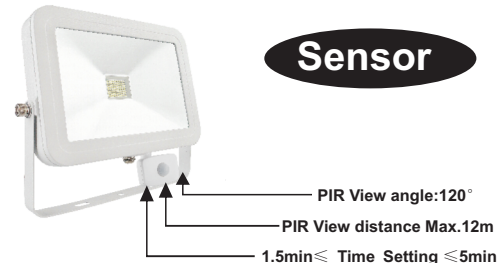

Producer: CHINA
Distributor: GLOBAL EXPORT-IMPORT KFT.
H-1151 BUDAPEST SZEKELY E. U. 11.
<http://www.global-export-import.eu>